


PRODUCT SPECIFICATIONS

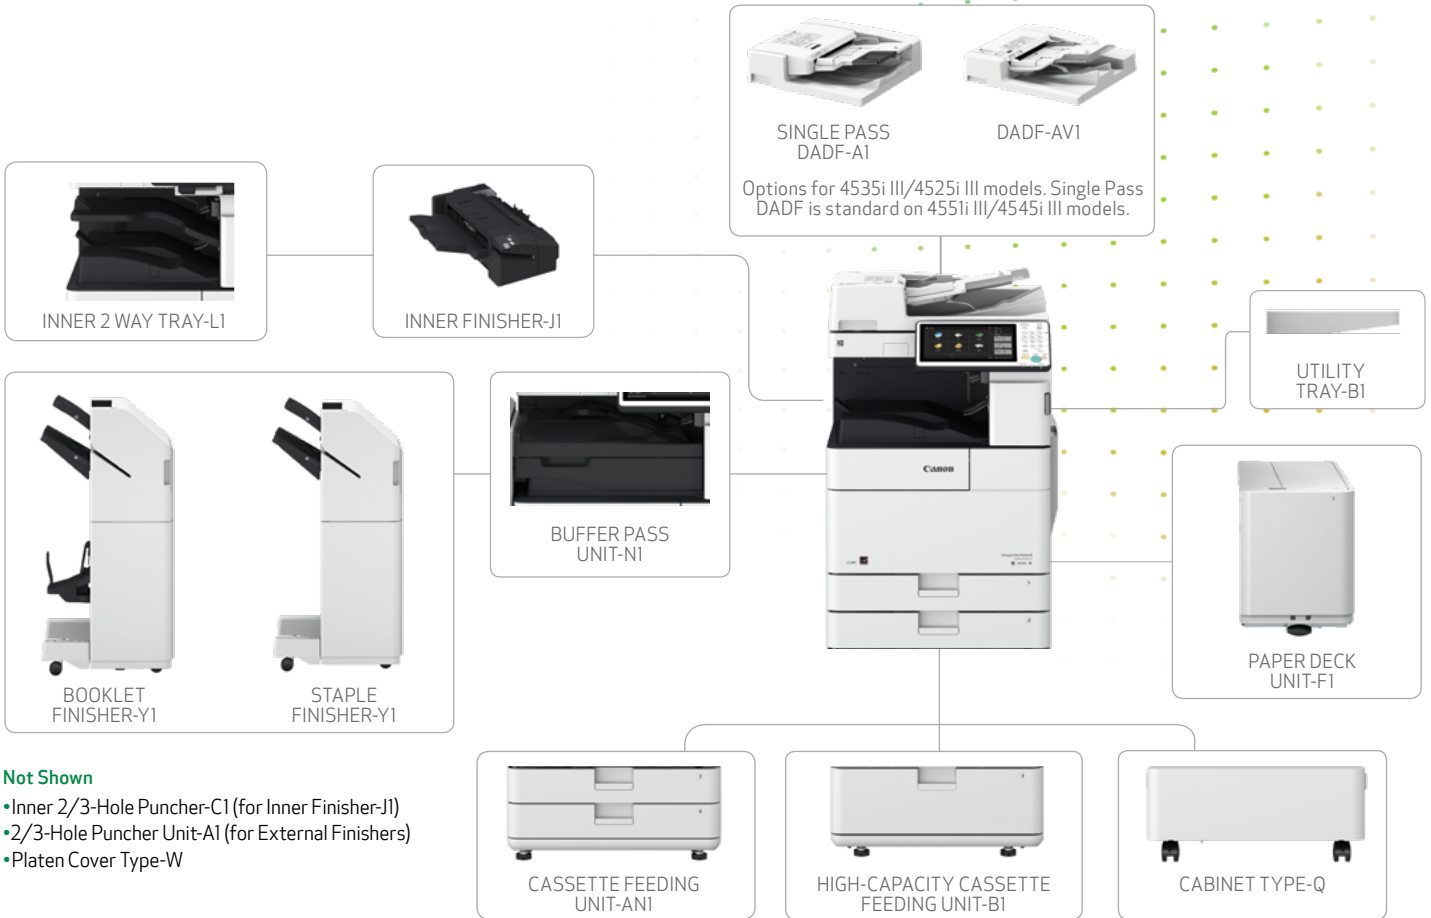

Not Shown

- Inner 2/3-Hole Puncher-C1 (for Inner Finisher-J1)
- 2/3-Hole Puncher Unit-A1 (for External Finishers)
- Platen Cover Type-W

Main Unit

Type
Monochrome Laser Multifunctional

Core Functions
Standard: Print, Copy, Scan, Send, Store
Optional: Fax

Processor
Canon Dual Custom Processor (Shared)

Control Panel
10.1" TFT LCD WSVGA Colour Touch-panel

Memory
3.0 GB RAM

Hard Disk Drive
Standard: 250 GB
Maximum: 1 TB

Mirroring Hard Disk Drive
Optional (250 GB, 1 TB)
Method: Raid

Print Resolution (dpi)
1200 x 1200

Interface Connection

Network
Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)
Optional: NFC, Bluetooth Low Energy

Others
Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device)
Optional: Serial Interface, Copy Control Interface

Paper Capacity (LTR, 20 lb. Bond)

Standard: 1,200 Sheets
Maximum: 6,350 Sheets

Paper Sources (LTR, 20 lb. Bond)

Standard: Two 550-sheet Paper Cassettes, 100-sheet Stack Bypass
Optional: Two 550-sheet Paper Cassettes (Cassette Feeding Unit-ANI), 2,450-sheet Paper Deck (High Capacity Cassette Feeding Unit-B1), 2,700-sheet Paper Deck (Paper Deck Unit-F1)

Paper Output Capacity (LTR, 20 lb. Bond)

Standard: 250 Sheets
Maximum: 3,350 Sheets (with External Finishers)

Finishing Capabilities

Standard: Collate, Group
With Inner Finisher: Collate, Group, Offset, Staple, Hole Punch,¹ Staple-Free Staple, Staple On Demand
With External Finisher: Collate, Group, Offset, Staple, Booklet,² Staple-Free Staple, Staple On Demand, Hole Punch³

Supported Media Types

Paper: Thin, Plain, Recycled, Colour, Heavy, Pre-punched
Cassettes: Thin, Plain, Recycled, Colour, Heavy, Pre-punched, Bond, Transparency, Label, Envelope

Supported Media Sizes

Paper: Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 15-3/8")
Cassette (1): 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 17")
Cassette (2): 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")

Supported Media Weights

Paper Cassettes: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Stack Bypass: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Duplexing: 16 lb. Bond to 28 lb. Bond (60 to 105 g/m²)

Warm-up Time

From Power On: Approx. 24 Seconds⁴

From Sleep

Mode: Approx. 10 Seconds⁵

Quick Startup

Mode: Approx. 4 Seconds⁵

Dimensions (W x D x H)

23-1/8" x 29-1/8" x 47" (587 mm x 740 mm x 1,193 mm)⁷

Installation Space (W x D)

Basic [With DADF (Stack Bypass and Cassette Drawers Open)]: 35" x 46-1/2" (889 mm x 1,182 mm)

Fully Configured [With ADF+Paper Deck Unit-F1+

Booklet Finisher-Y1 (Cassette Drawers Open)]:

71-3/8" x 50-3/8" (1,811 mm x 1,280 mm)

Weight

Approx. 240.3 lb. (109 kg)⁸

Print Specifications

Print Speed

455i III:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i III:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i III:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i III:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

Print Resolution (dpi)

1200 x 1200

Standard Page Description Languages

UFR III, PCL[®]6, Adobe[®] PS[®] 3

Direct Print

Available from USB, Advanced Box, Remote UI, and Web Access⁹

Supported File Types for Direct Print

PDF, TIFF, JPEG, EPS, XPS

Printing from Mobile Devices and Cloud-based Services

A range of software and MEAP-based solutions are available to provide printing from mobile devices or Internet-connected devices and cloud-based services depending on your requirements.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T (Japanese, Korean, Simplified and Traditional Chinese),¹⁰ Barcode Fonts¹¹

PS fonts: 136 Roman

Operating System¹²

UFR III: Windows Server 2008/Windows[®] 7/Server 2008 R2/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.9 or later)

PCL: Windows Server 2008/Windows 7/Server 2008 R2/Server 2012/Server 2012 R2/Windows 10/Server 2016

PS: Windows Server 2008/Windows 7/Server 2008 R2/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.9 or later)

PPD: MAC OS X (10.3.9 or later), Windows 7/Windows 8/Windows 8.1/Windows 10

Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Forced Hold Printing, Watermark, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Front/Back Covers, Toner Reduction, Poster Printing

Copy Specifications

Copy Speed

455i III:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i III:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i III:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i III:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

First-Copy-Out Time (Letter)

455i III:	As fast as 3.7 seconds
4545i III:	As fast as 3.8 seconds
4535i III:	As fast as 3.8 seconds
4525i III:	As fast as 5.2 seconds

Copy Resolution (dpi)

Reading: Up to 600 x 600
Printing: 1200 x 1200

Multiple Copies

Up to 9,999 Copies

Copy Exposure

Automatic or Manual (9 Levels)

Magnification

25%-400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper Setting, Previous Settings, Favorite Settings, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different-size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Detect Feeder Multi Sheet Feed, Free Size Original

Scan Specifications

Type

455i III/4545i III: Standard Single Pass Duplexing Automatic Document Feeder

4535i III/4525i III: Optional Single Pass Duplexing Automatic Document Feeder or Duplexing Automatic Document Feeder or Platen Cover

Document Feeder Paper Capacity

Single Pass DADF-A1: 150 Sheets (20 lb. Bond)

DADF-AV1: 100 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

Document Feeder Supported Media Weights

Single Pass DADF-A1

BW Original: 13 lb. Bond to 58 lb. Cover (50 to 157 g/m²)

Colour Original: 17 lb. Bond to 58 lb. Cover (64 to 157 g/m²)

DADF-AV1

BW Original: 13 lb. Bond to 34 lb. Bond (50 to 128 g/m²)

Colour Original: 17 lb. Bond to 34 lb. Bond (64 to 128 g/m²)

Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Height: Up to 2" (50mm); Up to 4.4 lb. (2 kg)]

Platen Supported Media Size

Max. scanning size: 11-3/4" x 17" (297 x 431.8 mm)

Pull Scan

Colour Network ScanGear2 for both Twain and WIA

Supported OS: Windows 7/8.1/10

Windows Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016

Scan Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to mobile devices and cloud-based services depending on your requirements.

Scan Speed (Letter)

Single Pass DADF-A1

Single-sided Scanning

BW: 80 ipm (300 dpi)/80 ipm (600 dpi)

Colour: 80 ipm (300 dpi)

Double-sided Scanning

BW: 160 ipm (300 dpi)/150 ipm (600 dpi)

Colour: 160 ipm (300 dpi)

DADF-AV1

Single-sided Scanning

BW: 70 ipm (300 dpi)/51 ipm (600 dpi)

Colour: 70 ipm (300 dpi)

Double-sided Scanning

BW: 35 ipm (300 dpi)/25.5 ipm (600 dpi)

Colour: 35 ipm (300 dpi)

Send Specifications

Destination

Email/Internet Fax (SMTP), SMB v3.0, FTP, WebDAV, Mail Box, Super G3 Fax (Optional), IP Fax (Optional)

Colour Mode

Automatic-Colour Select (Full Colour/Greyscale),

Automatic-Colour Select (Full Colour/Black-and-White),

Full Colour, Greyscale, and Black-and-White

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100

Communication Protocol

File: FTP (TCP/IP), SMB v3.0, WebDAV

Email: SMTP, POP3

File Format

Standard: TIFF, JPEG, PDF Device Signature

(Encrypted, Compact, Searchable, Apply Policy, Optimize for Web, PDF A/1-b, Device Signature), XPS (Device Signature, Compact, Searchable), Office Open XML (PowerPoint[®], Word)

Optional: PDF (User Signature, Trace & Smooth), XPS (User Signature)

Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, Email Priority, TX Report, Original Content Orientation, Skip Blank Originals, Detect Feeder Multi Sheet Feed

Fax Specifications

(Optional)

Maximum Number of Connection Lines

4

Modem Speed

Super G3: 33.6 Kbps
G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

Sending/Recording Size

Statement-R to 11" x 17"

Fax Memory

Up to 30,000 Pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 Dials

Sequential Broadcast

Max. 256 Addresses

Memory Backup

Yes

Fax Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Select Line, Selecting the Telephone Line, Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

Store Specifications

Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV Supported
Client PC: Windows (Windows 7/8.1/10)
Concurrent Connections (Max.):
SMB: 64
WebDAV: 3 (Active Sessions)

Advanced Box Available Disk Space

Approx. 16 GB (Standard HDD)
Approx. 480 GB (1 TB HDD)

Advanced Box Features

Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password

Memory Media

Standard: USB

Security Specifications

Authentication

Standard: Universal Login Manager, uniFLOW Online Express,¹⁹User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in
Optional: uniFLOW

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated), Verify System at Startup, McAfee Embedded Control²⁰
Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: Encrypted Secure Print, IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME, SIEM Integration

Document

Standard: Secure Watermark, Secure Print, Forced Hold Printing, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device Signatures
Optional: User Signatures, Document Scan Lock

Environmental Specifications

Operating Environment

Temperature: 50 to 86°F
Humidity: 20 to 80% RH (Relative Humidity)

Power Requirements

455i III: 120-127 V AC, 60 Hz, 10.4A
4545i III/4535i III: 120-127 V AC, 60 Hz, 9.3A
4525i III: 120-127 V AC, 60 Hz, 7A

Plug (Main Unit)

NEMA 5-15P

Power Consumption

Maximum: Approx. 1,500 W
Standby: Approx. 38 W¹⁴
Sleep Mode: Approx. 0.9 W¹⁵
Typical Electricity Consumption (TEC) Rating²¹:
455i III: 0.70 kWh
4545i III: 0.62 kWh
4535i III: 0.52 kWh
4525i III: 0.52 kWh

Standards

ENERGY STAR® Certified

Consumables

Toner

GPR-57 Toner BK

Toner Yield (Estimated @ 6% Coverage)

Black: 42,100 Images

Paper Supply Options

CASSETTE FEEDING UNIT-ANI

Paper: 550 sheets x 2 Cassettes
Capacity: [20 lb. Bond (80 g/m²)]
Paper Type: Thin, Plain, Recycled, Colour, Heavy, Pre-punched
Paper Size: 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, and Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 17" (139.7 x 182.0 to 297.0 x 431.8 mm)]
Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Power Source: From the Main Unit
Dimensions: 22-1/4" x 25-5/8" x 9-3/4"
(W x D x H): (565 mm x 650 mm x 248 mm)
Weight: 51.8 lb. (23.5 kg)

HIGH CAPACITY CASSETTE FEEDING UNIT-BI

Paper: 2,450 sheets [20 lb. Bond (80 g/m²)]
Capacity:
Paper Type: Thin, Plain, Recycled, Colour, Heavy, Pre-punched
Paper Size: Letter
Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Power Source: From the Main Unit
Dimensions: 22-1/4" x 25-5/8" x 9-3/4"
(W x D x H): (565 mm x 650 mm x 248 mm)
Weight: 61.7 lb. (28 kg)

PAPER DECK UNIT-F1 (Attached to the Main Unit)

Paper: 2,700 Sheets [20 lb. Bond (80 g/m²)]
Capacity:
Paper Type: Thin, Plain, Recycled, Colour, Heavy, Pre-punched
Paper Size: Letter
Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)
Power Source: From the Main Unit
Dimensions: 13-1/2" x 24-7/8" x 17-3/8"
(W x D x H): (344 mm x 630 mm x 440 mm)
Weight: 68.3 lb. (31 kg)

Output Options

INNER 2-WAY TRAY-L1

Number of Trays: 2
Total Output Capacity (Letter, 20 lb. Bond)
Upper Tray:¹⁶ 100 Sheets
Lower Tray:¹⁶ 250 Sheets
Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Paper Size (Standard): 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")
Weight: 1.7 lb (0.77 kg)

INNER FINISHER-J1

Number of Trays: 2
Top Tray Capacity:¹⁶ Letter/Statement-R/Executive, 11" x 17"/Legal/Letter-R (45 Sheets)
Lower Tray Capacity:¹⁶ Letter/Statement-R/Executive (500 Sheets), 11" x 17"/Legal/Letter-R (250 Sheets)
Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Staple Position: Corner, Double
Staple Capacity: Corner Staple and Double Staple
Letter/Executive: 50 Sheets (14 to 24 lb. Bond)
11" x 17"/Legal/Letter-R: 30 Sheets (14 to 24 lb. Bond)
Staple-Free Staple: 11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m²)]
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m²)]
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m²)]

Staple On Demand: 40 Sheets [20 lb. Bond (80 g/m²)]
Power Source: From the Main Unit
Weight: Approx. 16.1 lb (7.3 kg)

STAPLE FINISHER-Y1 (Requires Buffer Pass-N1)

Number of Trays: 2
Top Tray Capacity:¹⁶ Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray Capacity:¹⁶ Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)
Paper Weight: Top Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Lower Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Staple Position: Corner, Double
Staple Capacity: Corner Staple and Double Staple
Letter/Executive: 50 Sheets [24 lb. Bond (90 g/m²)]
11" x 17"/Legal/Letter-R: 30 Sheets [24 lb. Bond (90 g/m²)]
Staple-Free Staple: 11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m²)]
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m²)]
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m²)]

Staple On Demand: 50 Sheets [24 lb. Bond (90 g/m²)]
Power Source: From the Main Unit
Dimensions: 25-1/8" x 24-1/2" x 45"
(W x D x H): (637 mm x 623 mm x 1,142 mm)
Weight: Approx. 68.3 lb (31 kg)

BOOKLET FINISHER-Y1

Number of Trays: 2
Top Tray Capacity:¹⁶ Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray Capacity:¹⁶ Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)

Paper Weight
Top Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Lower Tray: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Staple Position: Corner, Double

Staple Capacity

Corner Staple and Double Staple

Letter/Executive: 50 Sheets [24 lb. Bond (90 g/m²)]
11" x 17"/Legal/Letter-R: 30 Sheets [24 lb. Bond (90 g/m²)]
Staple-Free Staple

11"x17"/Letter: 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m²)]
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m²)]
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m²)]

Staple On

Demand: 50 Sheets [24 lb. Bond (90 g/m²)]
Booklet-Stitch: 11" x 17", Legal, Letter-R, Custom Size
Paper Size: (7-3/4" x 10-5/8" to 11-3/4" x 17")
Booklet-Stitch Staple Capacity: 20 Sheets x 10 Sets [16 to 20 lb. Bond (60 to 81 g/m²)] [including one cover sheet up to 80 lb. Cover (220 g/m²)]

Power Source: From the Main Unit
Dimensions (W x D x H): 25-1/8" x 24-1/2" x 45"
(637 mm x 623 mm x 1,142 mm)¹⁷
Weight: Approx. 125.7 lb (57 kg)

INNER 2/3-HOLE PUNCHER-C1

(Requires the Inner Finisher-J1)

Acceptable Punch Paper: 14 lb. Bond to 80 lb. Cover
Weight: (52 to 220 g/m²)
Acceptable Punch Paper Size
Two holes: 11" x 17", Legal, Letter, Letter-R, Executive
Three holes: 11" x 17", Letter, Executive
Power Source: From the Main Unit

2/3-HOLE PUNCHER UNIT-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)

Acceptable Punch Paper: 14 lb. Bond to 80 lb. Cover
Weight: (52 to 220 g/m²)
Acceptable Punch Paper Size
Two holes: 11" x 17", Legal, Letter, Letter-R, Executive
Three holes: 11" x 17", Letter, Executive
Power Source: From the Main Unit

Additional Hardware Options

Card Readers

MiCARD PLUS PROXIMITY CARD READER
COPY CARD READER-F1
COPY CARD READER ATTACHMENT-B5

Others

PLATEN COVER TYPE W
ENVELOPE FEEDER ATTACHMENT KIT-D1
UTILITY TRAY-B1
USB KEYBOARD

Security Options

Document Security

DOCUMENT SCAN LOCK KIT-B2
iR-ADV SECURITY KIT-S1 FOR IEEE 2600 COMMON CRITERIA CERTIFICATION¹⁸

Data Security

HDD MIRRORING KIT-J1
2.5"/250 GB HDD-N1
2.5"/1 TB HDD-P1
REMOVABLE HDD KIT-A1

System and Controller Options

Print Accessories

PCL INTERNATIONAL FONT SET-A1

Barcode Printing

BARCODE PRINTING KIT-D1

System Accessories

WEB ACCESS SOFTWARE-K1
SERIAL INTERFACE KIT-K3
COPY CONTROL INTERFACE KIT-A1
CONNECTION KIT-A1 FOR BLUETOOTH LE
NFC KIT-C1
MEAP WEB CONNECTION KIT V5.3¹⁹

Fax Accessories

SUPER G3 FAX BOARD-AS2
SUPER G3 2ND LINE FAX BOARD-AS2
SUPER G3 3RD/4TH LINE FAX BOARD-AS2
REMOTE FAX KIT-A1

IP FAX EXPANSION KIT-B1

Other Options

Accessibility Accessories

ADF ACCESS HANDLE-A1
VOICE GUIDANCE KIT-G1
VOICE OPERATION KIT-D1
BRAILLE LABEL KIT-F1

Consumables

STAMP INK CARTRIDGE-C1
STAPLE-P1
STAPLE CARTRIDGE-Y1
STAMP UNIT-B1

- ¹ Requires the optional Inner 2/3 Hole Puncher-C1.
- ² Booklet Finisher-Y1 only.
- ³ Requires the optional 2/3 Hole Puncher Unit-A1.
- ⁴ Time from device power-on, until copy ready (not print reservation).
- ⁵ Time from exiting Sleep Mode to when printings is operational.
- ⁶ Time from device power-on to when key orientations can be performed on the touch panel display.
- ⁷ Includes Main Unit, Single Pass DADF-A1, and Cassette Feeding Unit-AN1.
- ⁸ Includes Main Unit, Single Pass DADF-A1, Cassette Feeding Unit-AN1, and consumables.
- ⁹ PDF print from Web sites is supported.
- ¹⁰ Requires the optional PCL International Font Set-A1.
- ¹¹ Requires the optional Barcode Printer Kit-D1.
- ¹² Other operating systems and environments including AS/400, UNIX, Linux and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.
- ¹³ No charge for this solution; however activation is required.
- ¹⁴ Reference Value (measured one unit).
- ¹⁵ 0.9 W sleep mode not available in all circumstances due to certain settings.
- ¹⁶ With 20 lb. Bond (80 g/m²) paper.
- ¹⁷ When the extension tray is extended.
- ¹⁸ Will launch at a later date.
- ¹⁹ No charge for this option; however it does need to be ordered.
- ²⁰ Requires Unified Firmware Platform v3.9
- ²¹ Based on ENERGY STAR Product Specification for Imaging Equipment Version 3.0.

 WWW.CANON.CA



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR guidelines for energy efficiency. The ENERGY STAR mark is a registered mark in Canada. McAfee and the McAfee logo are trademarks of McAfee LLC in Canada and/or other countries. Canon, imageRUNNER, imageWARE, imagePASS, and the GENUINE logo are registered trademarks of Canon Inc. in Canada and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. "II" indicates that this model has been upgraded to new system software and includes additional security features as standard. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon Canada Inc. does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with a Canon Sales Representative or a Canon Authorized Dealer for details. All printer output images are simulated. Products are shown with optional accessories. Specifications and availability subject to change without notice. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory or statutory compliance. Not responsible for typographical errors.

©2019 Canon Canada Inc. All rights reserved.



To learn about Canon's many awards, visit www.canon.ca/awards

 McAfee
PROTECTED

 UFP UNIFIED
FIRMWARE
PLATFORM

 CANON
GENUINE
TONER, CARTRIDGE
& PARTS

